

SELV    

Single Output Industrial DIN RAIL

MODEL	XDR-12U480	XDR-24U480	XDR-48U480
OUTPUT VOLTAGE	12V	24V	48V
CURRENT RANGE	0-27 A	0-20 A	0-10A

R:Redundancy and DC_OK K:DC_OK Only
R&K Refer to:Naming Convention

Features:

- Universal AC input 90~264Vac
- Built-in active PFC function
- Protections:Short circuit / Overload / Over voltage / Over temperature
- Can be installed on DIN rail TS-35/7.5 or 15
- The body width is only 50mm
- 100% full load burn-in test
- LED indicator for power on
- DC OK relay contact(Optional)
- Redundancy function(Optional)
- High efficiency/High reliability
- 3 years warranty
- Compliance to IEC/EN/UL 62368-1

INPUT

INPUT VOLTAGE	90~264Vac 127~370Vdc (Refer to the derating curve of "Loading and Input voltage")
POWER FACTORY	0.95
FREQUENCY RANGE	47~63Hz
EFFICIENCY	94%@12V 95%@24V 95%@48V
AC INPUT CURRENT	≤5A@115Vac ≤3.2A@230Vac
AC INRUSH CURRENT	20A@115Vac 45A@230Vac
LEAKAGE CURRENT	≤ 2mA/240Vac

PROTECTION

OVER LOAD	12V:150%-200% rated power, 125%-170% rated power,Protection Mode: Hiccup mode, recovers automatically after fault condition is removed
SHORT CIRCUIT	Hiccup mode,recovers automatically after fault condition is removed
OVER VOLTAGE	Protection Mode: Shunt down,recovers after repower on
OVER TEMPERATURE	Protection Mode: Shunt down,recovers after temperature drop

ENVIRONMENT

OPERATING TEMPERATURE	-30°C~+70°C (Refer to the derating curve of "Loading and Ambient temperature")
OPERATING HUMIDITY	20~90%RH non-condensing
STORAGE TEMP., HUMIDITY	-40°C~+85°C 10%~95%RH

WEIGHT & PACKING

MTBF	≥200Khrs.MIL-HDBK-217F(25°C)
PRODUCT DIMENSION	50x125.1x110mm(L*W*H)
NET WEIGHT	0.97KG
QUANTITY/CARTON	12PCS
GROSS WEIGHT	12. 6KG

OUTPUT


DC OUTPUT	12V	24V	48V
OUTPUT CURRENT	27A	20A	10A
RATED POWER	324W	480W	480W
VOLTAGE TOLERANCE	±1%	±1%	±1%
VOLTAGE ADJ.RANG	12~14V	24~28V	48~55V
RIPPLE NOISE	150mV P-P(Max.)	150mV P-P(Max.)	200mV P-P(Max.)
HOLD UP TIME(Typ.)	14mS/230Vac 14mS/115Vac		

SAFETY & EMC


SAFTY	UL62368-1, EN62368-1, GB4943.1
WITHSTAND VOLTAGE	I/P-O/P:3KVvac;I/P-FG:2KVvac;O/P-FG:0.5KVvac
ISOLATION	100M Ohms/500Vdc/25°C/70%RH

EMI	Parameter	Standard	Test Label/Note
	Conducted emission	BS EN/EN55032(CISPR32),FCC PART 15/CISPR22,GB9254. 1	Class B
	Radiated emission	BS EN/EN55032(CISPR32),FCC PART 15/CISPR22,GB9254. 1	Class B
	Harmonic current	BS EN/EN61000-3-2, GB17625. 1	Class A
	Voltage flicker	BS EN/EN61000-3-3	-----
EMS	BS EN/EN55035		
	Parameter	Standard	Test Label/Note
	ESD	BS EN/EN61000-4-2	Level 4,8KV air,Level2, 4KV contact,criteria A
	RF field susceptibility	BS EN/EN61000-4-3	Level 3, criteria A
	EFT bursts	BS EN/EN61000-4-4	Level 3, criteria A
	Surge susceptibility	BS EN/EN61000-4-5	Level 3,1KV/L-N,2KV/L/N-FG criteria A
	Conducted susceptibility	BS EN/EN61000-4-6	Level 3, criteria A
	Magnetic field immunity	BS EN/EN61000-4-8	Level 4, criteria A
	Voltage dips and interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods,30% dip 25 periods,>95% interruptions 250 periods

LOADING AND AMBIENT TEMPERATURE

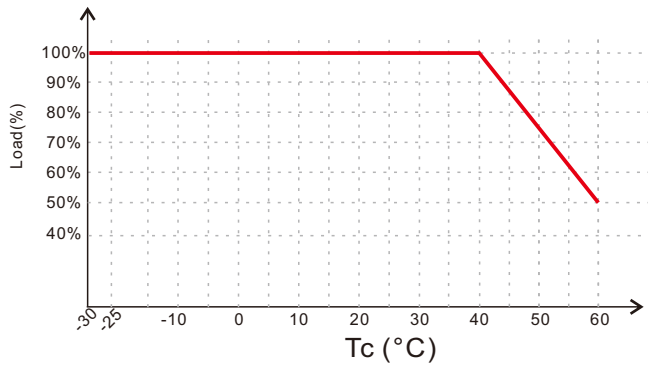

LOADING AND INPUT VOLTAGE

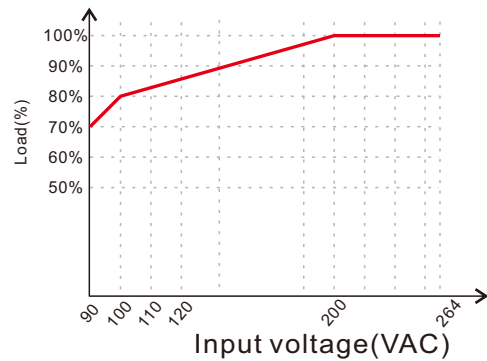



INSTALLATION GUIDE

Product is for indoor use.

- The power supply must be grounded before installation and power on.
 - Short circuit or overload will cause power supply protection, resulting in abnormal operation of the load (LED, instrument equipment, etc.).
 - Maintaining good ventilation and heat dissipation is crucial to the lifespan of the power supply. Do not install the product in a sealed high-temperature environment or near flammable and explosive materials. Do not block the power supply vent with foreign objects.
 - The connection line between the power supply and the load should be as short as possible. A connection line that is too long or too thin will cause a voltage drop on the line, resulting in insufficient LED brightness, uneven lighting, etc.
 - The product has low voltage and high current. Be sure to tighten the terminals during installation to avoid heat caused by poor contact.
- When installing the product, try to stay away from environments with relatively high temperatures.

PRODUCT DIMENSIONS

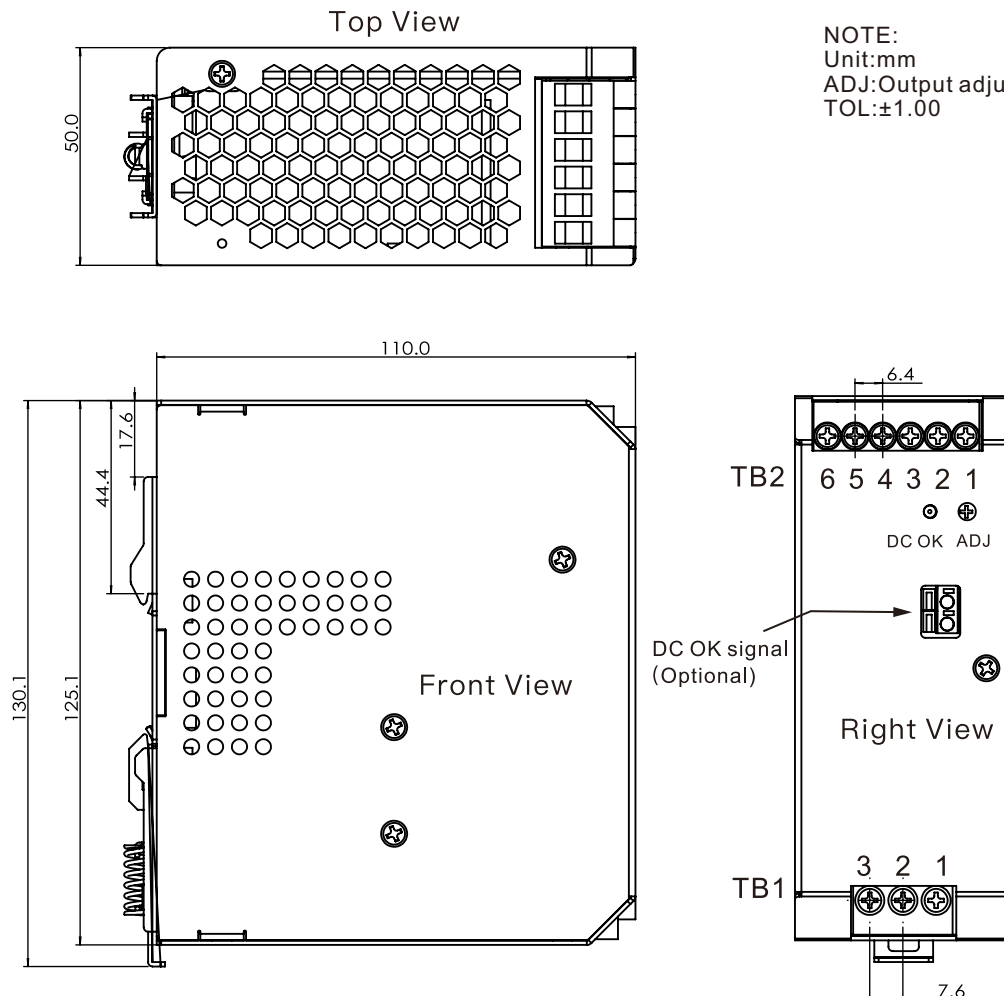

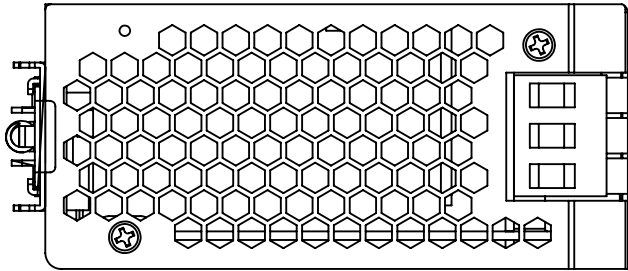

Bottom View

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15

Terminal Pin No.Assignment


TB1		TB2	
Pin No.	Assignment	Pin No.	Assignment
1	AC/L		
2	AC/N	1,2,3	DC output -V
3	FG	4, 5,6	DC output +V

DC OK Relay Contact(Options)


Contact closure	Power on/DC ok
Contact open	Power off/DC fail
Contact specifications (max.)	30V/1A Resistive load

Redundancy function(Options)

- 1, Built in redundancy function, capable of parallel connection of 2 single machines
- 2, When running in parallel, the maximum load should not exceed the rated power of any one power source

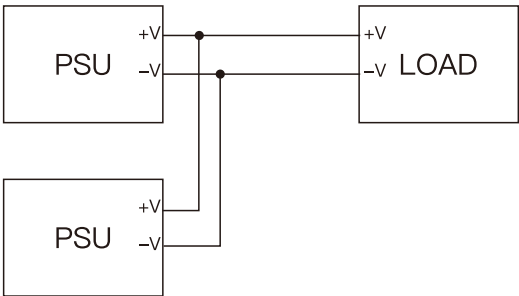

NAMING CONVENTION

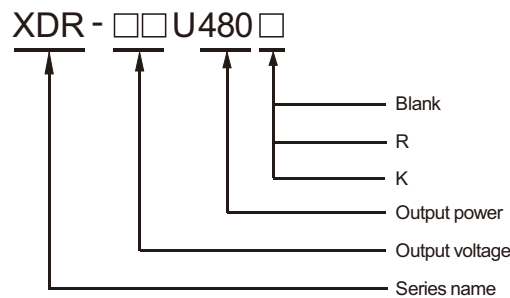

MODEL	FUNCTION	REMARKS
Blank	Enclosed	Standard
R	Built-in DC OK and Redundancy	Optional
K	DC OK Only, No Redundancy	Optional