

Constant Voltage LED Driver

SDN200-24/48VL6

SDN200-24VL8



Product description

The SDN200 series is an indoor constant voltage DALI LED driver. Its input voltage range is 198-264Vac, with a conversion efficiency of up to 94%. It adopts a fanless design and works at -20°C~+45°C with natural cooling and heat dissipation. The temperature range of the chassis, ultra-high power factor, ultra-low total harmonic distortion, low standby power consumption, and all-round protection functions not only greatly improve the reliability of the product, but also ensure the product life cycle. This series of products is designed for LED lighting design and used in indoor lighting. Suitable for various application environments in almost all indoor places where LED lamps can be installed. Comply with DALI2.0 standard (IEC 62386-101, 102, 207, 209), innovative thermal management technology, intelligent protection of power supply life.

Standards

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493
IEC 62386-101,102,207

Characteristics


- AC input range (220-240VAC)
- With active PFC function
- Waterproof rating IP20
- DALI-2.0 DT6/DT8 dimming driver
- Built-in press dimming function
- Dimming range 1-100%
- Suitable for dry indoor environments
- Protection type: short circuit/over temperature/over voltage protection
- Plastic shell, filled with glue inside
- Comply with world lighting equipment safety regulations
- 5 years warranty

Specifications

Model		SDN200-24VL6/8	SDN200-48VL6	
Output	turn on time(S)	<0.5		
	output power(W)	200		
	output voltage(V)	24	48	
	output voltage tolerance	≤±5%		
	ripple voltage(mV)	240	480	
	Line Regulation	1%		
	Load Regulation	3%		
	working current range(A)	0.833-8.33	0.416-4.16	
	SVM	0.1		
	Pst	0.1		
	dimming type	YES		
	dimming range	1-100%		
	Input	rated DC supply voltage(Vdc)	NA	
		rated supply voltage(Vac)	220-240	
voltage range(Vac)		198-264		
line frequency(Hz)		50/60		
input current(A)		1.2		
efficiency (TYPE)		93%@full load	94%@full load	
average efficiency(TYPE) 3 (TYPE)3		92%	93%	
no load power consumption(W)		≤0.5W		
power factor		0.95@full load		
Displacement factor		0.95		
THD(typ.) THD ()		5%		
inrush current(Ipk) (Ipk)		60A/440uS		
Leakage current (mA)		0.7@240Vac 60Hz		
Protection		short circuit protection	hiccup mode, restart automatically after fault correction.	
	over load protection	exceed maximum rated load times 1.6		
	Over voltage protection	Latch off,power on again after fault correction		
	Over temperature protection	Latch off,power on again after fault correction		
	surge capacity	L-N: 1KV		
	Withstand voltage	Input-Output:3000V/5mA/1min		
Ta(C)	-20...45(See derating curve)			


Ambient and Life	Tc max.(C)	max.90										
	Storage Temperature(C)	-30...80										
	ambient humidity range	5%...85%RH, Not condensing										
	nominal life-time(hrs)	50'000@Ta										
Other	dimensions (L×W×H) (mm)	334.8mm * 41.5mm * 27.5mm										
	weight(g)	400										
	casing material	Plastics										
	housing colour	White										
	type of protection	IP20										
	protection class	class II										
	certificate											
Note	<p>1.Tolerance:includes set up tolerance, line regulation and load regulation. 2.Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs. 3.Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic average of these four values. 4.All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 5.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p> <table border="1" data-bbox="292 1041 1465 1258"> <thead> <tr> <th>Function</th> <th>Press time</th> </tr> </thead> <tbody> <tr> <td>Status no change</td> <td><0.05 sec.</td> </tr> <tr> <td>Push ON/OFF</td> <td>0.1-1 sec.</td> </tr> <tr> <td>Long press to dim down or up</td> <td>1.5-10 sec.</td> </tr> <tr> <td>Long press in the off state, dimming from the minimum value</td> <td>>1 sec.</td> </tr> </tbody> </table> <p>PUSH push-button dimming/color temperature adjustment. Dimming: long press . Switch: short press. Dimming memory: When the light is turned off and turned on again, the light will return to the previously adjusted brightness level. Each long press will adjust the brightness in the opposite direction. Long press for more than 15S is a synchronization function, and all devices will be adjusted to 50%. Press and hold again to adjust the dimming brightness downward. (DT8 color temperature will be unified to 4500K, and long press again will adjust the color temperature downward.)</p>		Function	Press time	Status no change	<0.05 sec.	Push ON/OFF	0.1-1 sec.	Long press to dim down or up	1.5-10 sec.	Long press in the off state, dimming from the minimum value	>1 sec.
	Function	Press time										
Status no change	<0.05 sec.											
Push ON/OFF	0.1-1 sec.											
Long press to dim down or up	1.5-10 sec.											
Long press in the off state, dimming from the minimum value	>1 sec.											

Dimensions(mm)

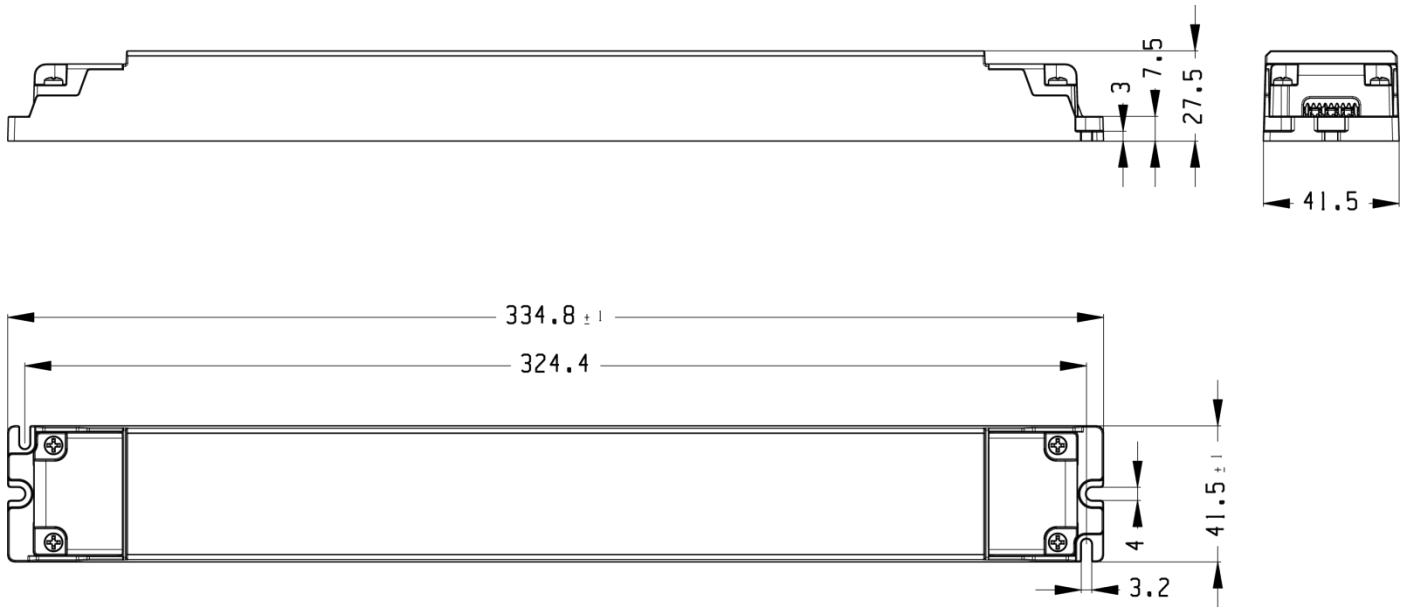


Wiring Diagram

DAI dimming scheme connection diagram (DT8) Note: LED-(C) is not connected when DT6 is connected

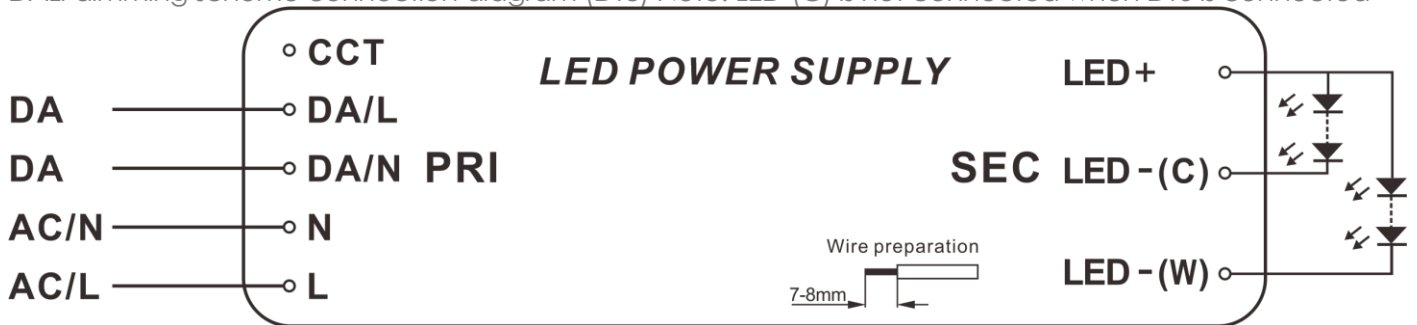

PUSH dimming scheme connection diagram (DT8) Note: When DT6 is connected, LED-(C) is not connected and Push CCT is not connected.

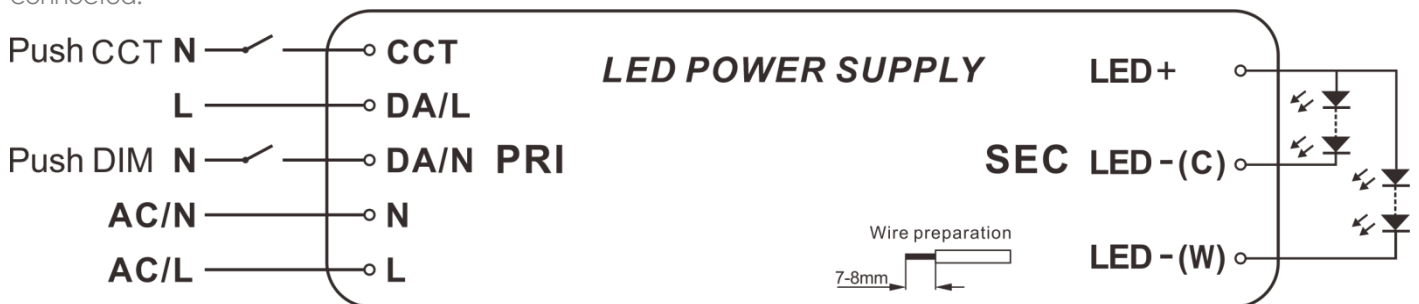

AC	H03VVH2-F 2*0.75mm ²
DAI	H03VVH2-F 2*0.75mm ²
DC	H05VVH2-F 2*1.0mm ²

Electrical curves

Fig. 1 Output load-Temperature curve

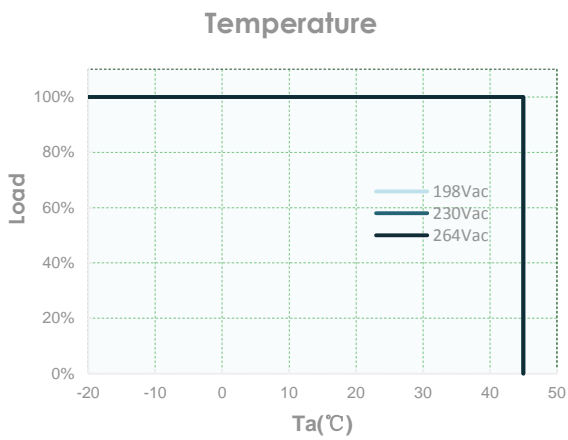


Fig. 2 Static characteristic curve

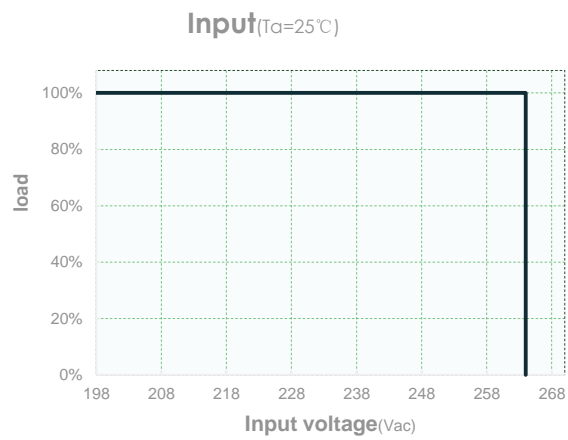


Fig. 3 I-V curve

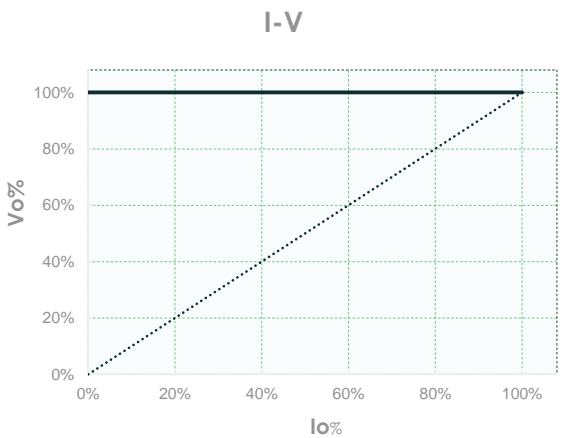


Fig. 4 Power factor characteristic curve

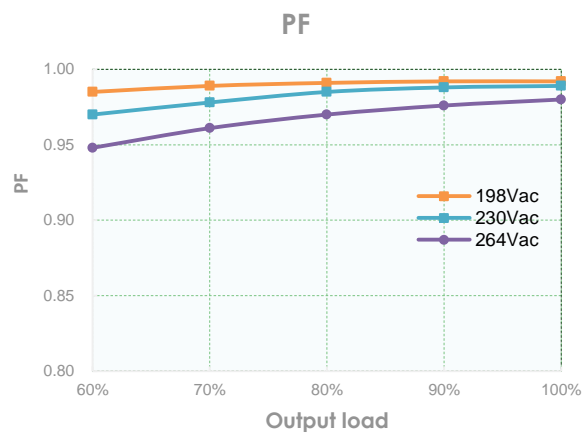


Fig.5 Total harmonic distortion curve (THD)


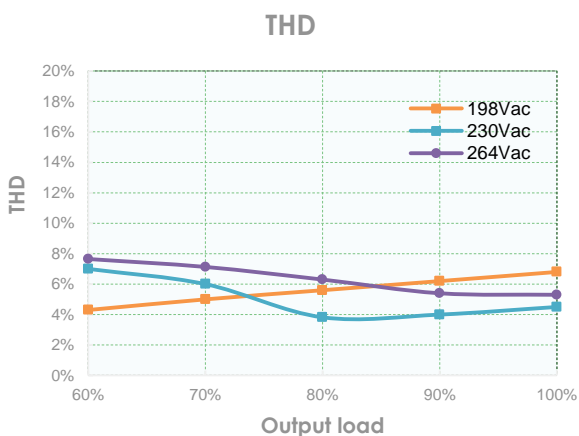


Fig.6 Efficiency-Load curve

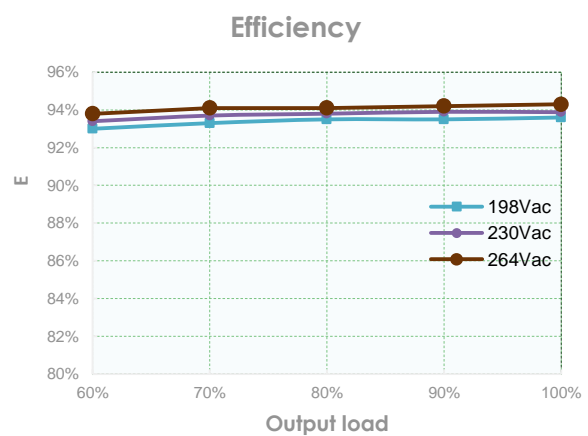

MCBS

MCBS Model	B10	B13	B16	B20	C10	C13	C16	C20
SDN200-24VL6/8	4	4	5	6	4	5	6	8
SDN200-24VL6	4	4	5	6	4	5	6	8

Package

Model	Carton quantity(pcs)	Carton dimension(mm)	G.W./CTN(kg)
SDN200-24VL6/8			
SDN200-24VL6			

Revision history

Date	Rev.	Remark
2023.11.14	A3	Version update
2023.12.18	A4	Push diagram added